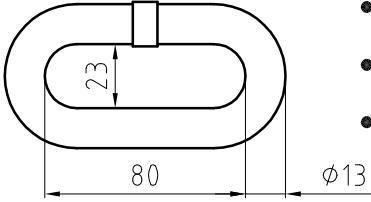




NAME	MODEL NO.
LASHING CHAIN	F-201/202/205/206

MODEL : F-200

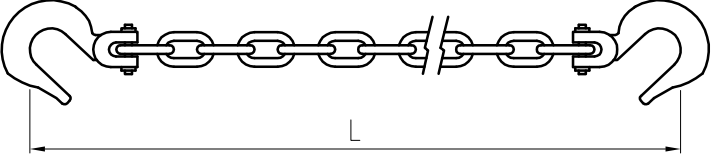
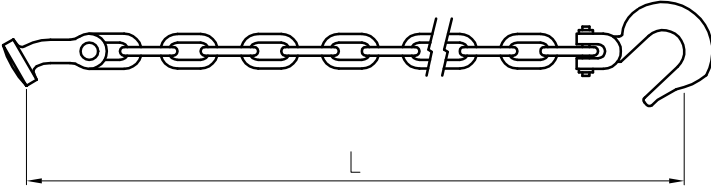
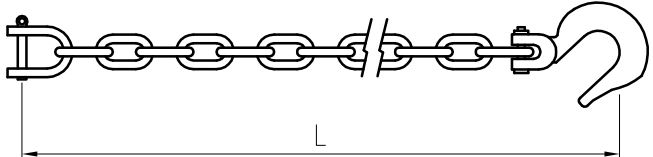
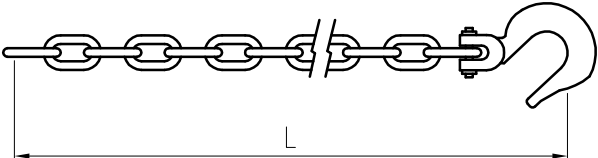


- Lashing chain will deteriorate in intensity about 20% by hot dip galvanizing.
- Following drawing shows LASHING CHAIN F-200.
- CHAIN TENSIONER or LASHING TURNBUCKLE is used with following LASHING CHAIN.
- Following shows various types which are combined with LASHING CHAIN F-200.
- Inner length & width holds some tolerances.

FINISH : Tar

B.L. : 20ton (Tensile load)

- (L) is meter in principal.
- (L) can be set in compliance with your order.
- Weight is based on per 3 meter.

SHAPE	MODEL	WEIGHT	ADAPTED END FITTINGS
	F-201	12 kg	K-24 & K-24
	F-202	11.3kg	K-4 & K-24
	F-205	11.3kg	K-16 & K-24
	F-206	10.3kg	K-24