




TRANSPORT CHAIN & ACCESSORIES

INTRODUCTION

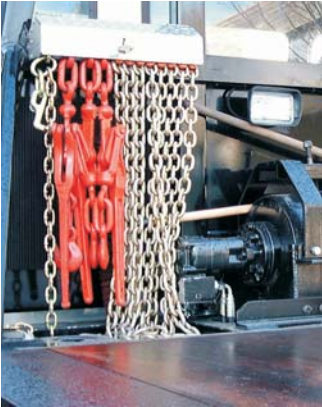

Wesco Industries grade 70 transport chain is for use in load binding, towing and logging (**do not use for overhead lifting**). It is manufactured in accordance to Department of Transport regulations. The standard finish is gold chromate.

Binder chains can be manufactured to customer specifications. When ordering please specify the following information:

- Chain Diameter
- Chain Length
- End fitting type: Clevis Grab Hook, Clevis Slip Hook etc.
- Hook fitting one end or both ends.

Loadbinders, Ratchet Loadbinders and winches are available for securing your load.

GRADE 70 CHAIN

Wesco Industries grade 70 transport chain is for use in load binding, towing and logging (**do not use for overhead lifting**). It is manufactured in accordance to Department of Transport regulations. The ultimate strength is four times the Working Load Limit and the standard finish is gold chromate.



Diameter	Stock Code	Weight per 100 feet Pounds	Working Load Limit
1/4	0807-08C	94	3,150lbs
5/16	0807-10C	111	4,700lbs
3/8	0807-12C	150	6,600lbs
7/16	0807-14C	212	8,750lbs
1/2	0807-16C	260	11,300lbs

- Chain can be supplied in bulk or as tie down assemblies.



HOOKS



Wesco Industries have hooks suitable for grade 70 transport chain. The most common hooks for this chain are either the clevis grab hook or the clevis slip hook. We stock both Domestic and Import product (1/4", 5/16" & 3/8" Only), so please specify your preference at time of order. Other hook styles are available, please contact Wesco for further details. Transport chain hooks **should NOT be used for lifting**.

Clevis Grab Hooks



Chain Size	Stock Code	Weight Each Pounds	Working Load Limit
1/4	38CL-A08	0.32	4,100lbs
5/16	38CL-A10	0.59	5,100lbs
3/8	38CL-A12	0.92	7,100lbs
7/16	38CL-A14	1.32	10,000lbs
1/2	38CL-A16	2.00	12,000lbs

- Hooks can be supplied in loose or part of tie down assemblies.

Clevis Slip Hooks



Chain Size	Stock Code	Weight Each Pounds	Working Load Limit
1/4	39CL-A08	0.75	4,100lbs
5/16	39CL-A10	1.00	5,100lbs
3/8	39CL-A12	1.40	7,100lbs
7/16	39CL-A14	2.00	10,000lbs
1/2	39CL-A16	3.10	12,000lbs

- Hooks can be supplied loose or part of tie down assemblies.




LOADBINDERS



Wesco Industries have a range of loadbinders (cinches) suitable for tensioning chain. We stock both Domestic and Import product (standard and ratchet loadbinders only), so please specify your preference at time of order. Other hook styles are available, please contact Wesco for further details. Transport loadbinders **should NOT**

Lever Loadbinders

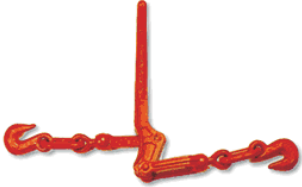

Chain Sizes	Stock Code	Weight Each Pounds	Working Load Limit
3/16 - 1/4	04ST-08DI	3	2,600lbs
5/16 - 3/8	04ST-12DI	8	5,400lbs
3/8 - 1/2	04ST-16DI	10	9,200lbs

Cam Release Loadbinders



Chain Sizes	Stock Code	Weight Each Pounds	Working Load Limit
5/16 - 3/8	04CR-12DI	8	5,400lbs

Snubber Loadbinders



Chain Sizes	Stock Code	Weight Each Pounds	Working Load Limit
5/16 - 3/8	04SN-12DI	14.6	5,400lbs

Ratchet Loadbinders




Chain Sizes	Stock Code	Weight Each Pounds	Working Load Limit
5/16 - 3/8	04RA-12DI	12	5,200lbs
3/8 - 1/2	04RA-16DI	14	9,200lbs
1/2 - 5/8	04RA-20DI	16	13,000lbs



POLYESTER TIE DOWN ASSEMBLIES

INTRODUCTION

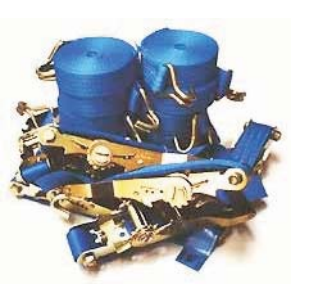

Wesco Industries manufacture a complete range of truck tie down assemblies and associated products from 1 inch to 4 inch wide webbing. Every assembly is manufactured to strict quality standards and use only the best hardware available.

With our in house manufacturing facilities we can produce any custom length or hardware configuration required. All tie down assemblies are rated for lashing capacities only and **should not be used for lifting purposes.**

When ordering tie down assemblies the following information is required:



- Webbing width (1", 2", 3" or 4" Wide).
- Type: Ratchet (Short or long handle), Cam Buckle or Winch Strap only.
- Length of strap.
- Hardware required: Wire Hooks (3/8" or 1/2"), S Hooks, Flat Hooks or Dee Rings.
- Colour of webbing material (if important).

HARDWARE

Ratchet Buckles



Short Handle



Long Handle



Over Centre Buckle



Cam Buckle

End Fittings



3/8" Wire Hook



1/2" Wire Hook



Delta Ring



S Hook



Flat Hook



Snap Hook



E Track Fitting



F Track Fitting



RATCHET TIE DOWNS

1" Wide

This size is commonly used for small utility or van tie downs. Standard assemblies come complete with 9" fixed end and 16 feet strap.



1" Ratchet Tie Down with Wire Hooks
Breaking Strength 2,500lbs.
Rated Capacity 835lbs.



1" Ratchet Tie Down with 'S' Hooks
Breaking Strength 1,200lbs.
Rated Capacity 400lbs.

2" Wide

This size is the most commonly used tie down and is suitable for a wide range of applications including flat bed trucks and van tie downs . Standard assemblies come complete with 18" fixed end and 25 feet strap.



2" Ratchet Tie Down with 3/8" Wire Hooks
Breaking Strength 5,000lbs.
Rated Capacity 1,670lbs.



2" Ratchet Tie Down with 1/2" Wire Hooks
Breaking Strength 10,000lbs.
Rated Capacity 3,335lbs.



2" Ratchet Tie Down with Flat Hooks
Breaking Strength 10,000lbs.
Rated Capacity 3,335lbs.



2" Ratchet Tie Down with Dee Fittings
Breaking Strength 10,000lbs.
Rated Capacity 3,335lbs.



2" Ratchet Tie Down with E Track Fittings
Breaking Strength 3,000lbs.
Rated Capacity 1,000lbs.



3" & 4" Wide

This size is commonly used on flat bed trucks. Standard assemblies come complete with 18" fixed end and 30 feet strap.



Ratchet Tie Down with Wire Hook

4" Wide: Breaking Strength 20,000lbs, Rated Capacity 6,660lbs



Ratchet Tie Down with Dee Fittings

3" Wide: Breaking Strength 16,200lbs, Rated Capacity 5,400lbs.
4" Wide: Breaking Strength 20,000 lbs, Rated Capacity 6,660lbs.



Ratchet Tie Down with Flat Hook

3" Wide: Breaking Strength 16,200lbs, Rated Capacity 5,400lbs.
4" Wide: Breaking Strength 16,200 lbs, Rated Capacity 5,400lbs.

CAM BUCKLE & OVER CENTRE



Cam buckle & over centre tie downs are manufactured to order. They are available in 1" and 2" wide webbing. Assemblies would be manufactured with a 12" fixed end. Specifications required at time of order are as follows:

- Webbing Width (1" or 2").
- Buckle type (Cam or Over Centre).
- Hardware required (Hooks, Ring or E Track).
- Strap Length.





WINCHES & STRAPS

Web Straps



Tie down straps can be manufactured in any configuration of width, length and hardware fittings. The straps that are stocked are generally suitable for truck winches and have a hook or fitting sewn on one end only.

Stocked items include straps in 4" wide webbing x 30 feet with either a Dee Ring Fitting or Flat Hook and are available in an array of colours. Also stocked are 2" wide webbing straps x 25 feet with either a Wire Hook, Dee Ring or Flat Hook.

Truck Winches

Winches are designed to clip or weld onto the side of a truck or trailer. They will accept a four inch wide webbing strap, and are available in Low Profile or Standard types.



Style	Stock Code	Mounting	Working Load Limit
Standard	44WN-PRT	Portable	5,000lbs
Low Profile	44WN-PRTLTP	Portable	5,000lbs
Standard	44WN-REG	Weld-On	5,400lbs
Low Profile	44WN-RHM	Weld-On	5,400lbs



Portable Standard



Portable Low Profile



Weld On Standard



Weld On Low Profile

Accessories

A range of Winch bars and strap protectors are available for truck winches and straps. Please contact Wesco Industries for further details.






TOWING HARDWARE

WEB STRAPS


Wesco Industries manufacture a range of products suitable for the Tow Truck industries. Products include Wheel Lift Straps, Ratchet Loop Assemblies, Transport Bridle Assemblies and Wheel Tie Down Straps. Webbing straps can include towing hooks and cluster assemblies where required. Information required at time of order includes:



- Assembly type or application.
- Webbing Width (Standard is 2").
- Hardware if required ("J" Hooks, "T" Hook, "R" Hook, Clusters).
- Strap Length.
- Is a Ratchet Required.

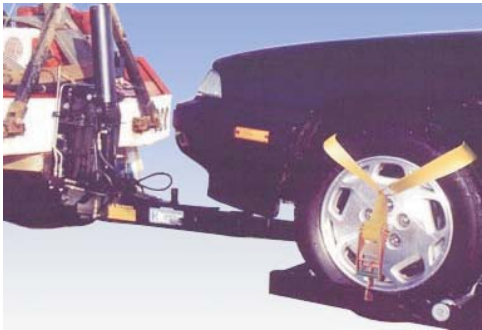

WIRE ROPES & BLOCKS

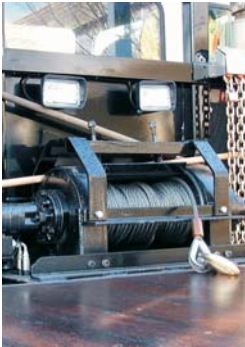

Wesco Industries manufacture replacement wire ropes for winches. Information required at time of order includes:

- Wire rope diameter.
- Length.
- Hardware required (Thimble Eye, Standard Hook, "J" Hooks, "T" Hook, "R" Hook, Clusters).

Wesco stock a large range of heavy duty snatch blocks for wire rope.

Please contact Wesco Industries for further details on wire rope and blocks.



SPECIALIZED TOWING HOOKS

Wesco Industries stock a large range of specialized towing hooks and assemblies. Products include "J" Hooks, "T" Hooks, "R" Hooks, Cluster assemblies and bridle assemblies.



Cluster Assemblies



Chain Bridle Assemblies - Multi Leg & Single Leg



R Hook



T Hook



J Hook - Eye



J Hook - Clevis

RECOVERY STRAPS & ROPES

Wesco Industries produce and manufacture a recovery straps which can be used to retrieve vehicles from a trapped situation (mud and sand) or general towing purposes.



Tow ropes can also be manufactured from Nylon rope for situations requiring the rope to stretch, or Polyester rope for application requiring very little stretch. Tow ropes can be used for recovery of vehicles, winch extension, general towing or retrieving vehicles from a trapped situation.

